


- Feature
- Third-party IP cameras supported with ONVIF conformance
 - Dual gigabit network interfaces
 - 4 HDDs, up to 24 TB, support JBOD
 - Compatibel with QIHAN free DDNS
 - Up to 8 Megapixels resolution recording, storage and playback
 - Simultaneous HDMI and VGA output, the resolution is up to 4K2K/8MP
 - Up to 16 channels synchronously playback
 - Support instant playback
 - Support corridor mode

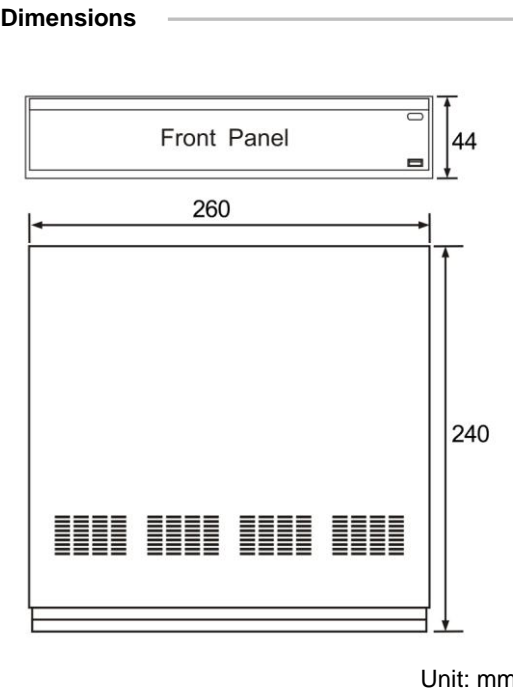

Technical Specifications

Model	QH-N5104F-H
Video/Audio Input	
IP Video Input	4 CH
Two-way Audio Input	1 CH, RCA (2.0 Vp-p, 1kΩ)
Network	
Incoming bandwidth	40Mbps
Outgoing bandwidth	80Mbps
Video/Audio Output	
HDMI Output	1
VGA Output	1
Audio Output	1 CH, RCA
Decoding	
Live View/Playback Resolution	8MP/6MP/5MP/4MP/3MP/1080P/960P/720P/VGA/D1/CIF
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080P/960P/720P/VGA/D1/CIF
Synchronous Playback	4 CH
	1 x 4K@30, 3 x 4MP@20, 4 x 1080p@25, 8 x 720p@25, 16 x D1
Hard Disk	
SATA	1
Capacity	Up to 6TB for each disk
External Interface	
Network Interface	1 RJ-45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel: 2 x USB2.0
Alarm In	4
Alarm Out	1
General	
Power Supply	12V, DC
Consumption	≤ 8 W
Working Temperature	-10°C ~ 55°C (14°F ~ 131°F)
Working Humidity	10% - 90%
Dimensions	44 x 260 x 240mm (1.7" x 10.2" x 9.4")
Weight(without HDD)	≤ 1.12 Kg (2.47 lb)