

# ATS1810


## 4 way relay board

### Product Overview

---

A 4-way relay card provides four single pole relays with connection terminals to the common (C), normally open (NO), and normally closed (NC) contacts. The relay contacts are rated at 1 Amp @ 0 to 30 VDC; reducing to 300 mA @ 48 VDC. If fitted to a DGP, two relay modules can be connected together in daisy-chain fashion to provide up to eight relays on ATS1201. When fitted to the ATS control panel or 4-door/4-lift DGP, only one relay module is allowed providing four relays.

An LED is provided for every relay to indicate activation.

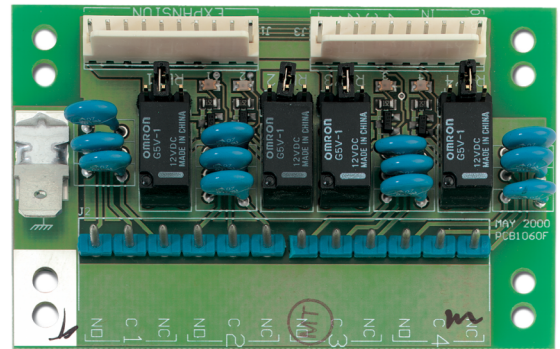

# ATS1810

## 4 way relay board

### Technical specifications

---

#### General

Expander type	Output expander
Product line	Advisor Advanced, ATS Master
Connection type	Plug-in

#### Electrical

Operating voltage	10.5 to 13.8 VDC
Current consumption	100 mA max.
Integrated power supply	No

#### Physical

Physical dimensions	80 mm x 52 mm (W x H)
---------------------	-----------------------

#### Environmental

Operating temperature	0° to +50°C
Relative humidity	95% non-condensing