

# **Apartment Outdoor Station**



#### **Features**

- 3.5-inch TFT screen, vivid pictures are on show
- Tempered glass panel, touch buttons.
- Adopt TCP/IP network host, support SNMP network protocol.
- Network security technology, provides stable and safe operating environment.
- Support night vision, voice indication
- Support card and password to open the door
- Support visitor leaving audio and video function message
- IP65

# **Specifications**

Mode		DH-VTO1220BW
System	Main Processor	Embedded micro processor
	Operation	Embedded LINUX OS
	System	




# DH-VTO1220BW


Video       Compression Standard       H.264         Input/Approaching Induction       1.3 megapixel CMOS camera         Black Light       Support         Auto       Light Compensation         Audio Input       Microphone         Audio Output       Built-in speaker         Bidirectional Talk       Support dual-way bidirectional talk         Display       LCD Dimensions       3.5-inch TFT screen         Resolution       320*240         Operation       Input       Touch keyboard         Mode       Card       Built-in IC card induction reader         Approaching Induction       Body Approaching       IR,1 meter         Alarm       Vandal proof       Support         Access       NC Output       Support         Access       NC Output       Support         Control       Door on/off Button       Support         Door on/off Button       Support         Network       Ethernet       10M/100Mbps Self-adaptive         Network       TCP/IP         Storage       Memory       128MB         Power       DC 10-15V         Power Consumption       Standby ≤1W, work ≤10W         Working       -40°C + 60°C			·
Input/Approaching   Induction   I.3 megapixel CMOS camera	Video		H.264
Video   Induction   1.3 megapixel CMOS camera			
Induction   Black Light   Support			1.3 megapixel CMOS camera
Auto Compensation     Support       Audio Input     Microphone       Audio Output     Built-in speaker       Bidirectional Talk     Support dual-way bidirectional talk       Display     LCD Dimensions     3.5-inch TFT screen       Resolution     320*240       Operation Mode     Input     Touch keyboard       Approaching Induction     Body Approaching     IR,1 meter       Alarm     Vandal proof     Support       Access     NC Output     Support       Control     Door on/off Button     Support       Door Status Detect     Support       Network     Ethernet     10M/100Mbps Self-adaptive       Network Protocol     TCP/IP       Storage     Memory     128MB       Power     DC 10-15V       Power Consumption     Standby ≤1W, work ≤10W       Working     -40°C - +60°C       Environments     10% -95%RH       Water Proof     IP65       Dimensions     408.0mm*150.0mm*46.4mm (L*W*T);       Weight     1.6Kg;		Induction	The megapiner emed camera
Compensation     Support       Audio     Audio Input     Microphone       Audio     Audio Output     Built-in speaker       Bidirectional Talk     Support dual-way bidirectional talk       Display     LCD Dimensions     3.5-inch TFT screen       Resolution     320*240       Operation     Input     Touch keyboard       Mode     Card     Built-in IC card induction reader       Approaching Induction     IR,1 meter       Alarm     Vandal proof     Support       No Output     Support       Access     NC Output     Support       Control     Door on/off Button     Support       Door Status Detect     Support       Network     Ethernet     10M/100Mbps Self-adaptive       Network Protocol     TCP/IP       Storage     Memory     128MB       Power     DC 10~15V       Power Consumption     Standby ≤1W, work ≤10W       Working     -40°C + 60°C       Environments     10% -95%RH       Water Proof     IP65       Dimensions     408.0mm*150.0mm*46.4mm (L*W*T);       Weight     1.6Kg;		Black Light	Support
Audio   Audio   Input   Audio   Audio   Output   Built-in speaker		Auto Light	Cumport
Audio       Audio Output       Built-in speaker         Bidirectional Talk       Support dual-way bidirectional talk         Display       LCD Dimensions       3.5-inch TFT screen         Resolution       320*240         Operation       Input       Touch keyboard         Mode       Card       Built-in IC card induction reader         Approaching Induction       Body Approaching       IR,1 meter         Alarm       Vandal proof       Support         Access       NC Output       Support         Access       NC Output       Support         Control       Door on/off Button       Support         Door on/off Button       Support         Network       Ethernet       10M/100Mbps Self-adaptive         Network Protocol       TCP/IP         Storage       Memory       128MB         Power       DC 10~15V         Power Consumption       Standby ≤1W, work ≤10W         Working       -40°C - +60°C         Environments       10%-95%RH         Water Proof       IP65         Dimensions       408.0mm*150.0mm*46.4mm (L*W*T);         Weight       1.6Kg;		Compensation	Зирроп
Bidirectional Talk   Support dual-way bidirectional talk		Audio Input	Microphone
Display	Audio	Audio Output	Built-in speaker
Resolution   320*240		Bidirectional Talk	Support dual-way bidirectional talk
Operation       Input       Touch keyboard         Mode       Card       Built-in IC card induction reader         Approaching Induction       Body Approaching       IR,1 meter         Alarm       Vandal proof       Support         No Output       Support         NC Output       Support         Door on/off Button       Support         Door Status Detect       Support         Ethernet       10M/100Mbps Self-adaptive         Network       Retwork Protocol       TCP/IP         Storage       Memory       128MB         Power       DC 10~15V         Power Consumption       Standby ≤1W, work ≤10W         Working       -40°C -+60°C         Environments       10%-95%RH         Water Proof       IP65         Dimensions       408.0mm*150.0mm*46.4mm (L*W*T);         Weight       1.6Kg;	Display	LCD Dimensions	3.5-inch TFT screen
Mode       Card       Built-in IC card induction reader         Approaching Induction       Body Approaching       IR,1 meter         Alarm       Vandal proof       Support         No Output       Support         Access       NC Output       Support         Door on/off Button       Support         Door Status Detect       Support         Network       Ethernet       10M/100Mbps Self-adaptive         Network Protocol       TCP/IP         Storage       Memory       128MB         Power       DC 10~15V         Power Consumption       Standby ≤1W, work ≤10W         Working       -40°C - +60°C         Environments       10%-95%RH         Water Proof       IP65         Dimensions       408.0mm*150.0mm*46.4mm (L*W*T);         Weight       1.6Kg;		Resolution	320*240
Approaching Induction       Body Approaching       IR,1 meter         Alarm       Vandal proof       Support         Access       No Output       Support         Control       Door on/off Button       Support         Door Status Detect       Support         Network       Ethernet       10M/100Mbps Self-adaptive         Network Protocol       TCP/IP         Storage       Memory       128MB         Power       DC 10~15V         Power Consumption       Standby ≤1W, work ≤10W         Working       -40°C - +60°C         Environments       10%-95%RH         Water Proof       IP65         Dimensions       408.0mm*150.0mm*46.4mm (L*W*T);         Weight       1.6Kg;	Operation	Input	Touch keyboard
Body Approaching   IR,1 meter	Mode	Card	Built-in IC card induction reader
Induction         Alarm         Vandal proof         Support           No Output         Support           Nc Output         Support           Door on/off Button         Support           Door Status Detect         Support           Network         Ethernet         10M/100Mbps Self-adaptive           Network Protocol         TCP/IP           Storage         Memory         128MB           Power         DC 10~15V           Power Consumption         Standby ≤1W, work ≤10W           Working         -40°C - +60°C           Environments         10%-95%RH           Water Proof         IP65           Dimensions         408.0mm*150.0mm*46.4mm (L*W*T);           Weight         1.6Kg;		Body Approaching	IR.1 meter
Access         No Output         Support           Control         Door on/off Button         Support           Door Status Detect         Support           Network         Ethernet         10M/100Mbps Self-adaptive           Network Protocol         TCP/IP           Storage         Memory         128MB           Power         DC 10~15V           Power Consumption         Standby ≤1W, work ≤10W           Working         -40°C - +60°C           Environments         10%-95%RH           Water Proof         IP65           Dimensions         408.0mm*150.0mm*46.4mm (L*W*T);           Weight         1.6Kg;	Induction	3	,
Access         NC Output         Support           Control         Door on/off Button         Support           Door Status Detect         Support           Network         Ethernet         10M/100Mbps Self-adaptive           Network Protocol         TCP/IP           Storage         Memory         128MB           Power         DC 10~15V           Power Consumption         Standby ≤1W, work ≤10W           Working         -40°C - +60°C           Environments         10% - 95%RH           Water Proof         IP65           Dimensions         408.0mm*150.0mm*46.4mm (L*W*T);           Weight         1.6Kg;	Alarm	Vandal proof	Support
Control         Door on/off Button         Support           Door Status Detect         Support           Network         Ethernet         10M/100Mbps Self-adaptive           Network Protocol         TCP/IP           Storage         Memory         128MB           Power         DC 10~15V           Power Consumption         Standby ≤1W, work ≤10W           Working         -40°C - +60°C           Environments         10%-95%RH           Water Proof         IP65           Dimensions         408.0mm*150.0mm*46.4mm (L*W*T);           Weight         1.6Kg;		No Output	Support
Door Status Detect   Support	Access	NC Output	Support
Ethernet         10M/100Mbps Self-adaptive           Network         Protocol         TCP/IP           Storage         Memory         128MB           Power         DC 10~15V           Power Consumption         Standby ≤1W, work ≤10W           Working         -40°C - +60°C           Environments         10% - 95%RH           Water Proof         IP65           Dimensions         408.0mm*150.0mm*46.4mm (L*W*T);           Weight         1.6Kg;	Control	Door on/off Button	Support
Network         Network Protocol         TCP/IP           Storage         Memory         128MB           Power         DC 10~15V           Power Consumption         Standby ≤1W, work ≤10W           Working         -40°C - +60°C           Environments         10%-95%RH           Water Proof         IP65           Dimensions         408.0mm*150.0mm*46.4mm (L*W*T);           Weight         1.6Kg;		Door Status Detect	Support
Network Protocol         TCP/IP           Storage         Memory         128MB           Power         DC 10~15V           Power Consumption         Standby ≤1W, work ≤10W           Working         -40°C − +60°C           Environments         10%−95%RH           Water Proof         IP65           Dimensions         408.0mm*150.0mm*46.4mm (L*W*T);           Weight         1.6Kg;	Network	Ethernet	10M/100Mbps Self-adaptive
$ \begin{tabular}{lllllllllllllllllllllllllllllllllll$		Network Protocol	TCP/IP
Power Consumption         Standby ≤1W, work ≤10W           Working         -40°C − +60°C           Environments         10%−95%RH           Water Proof         IP65           Dimensions         408.0mm*150.0mm*46.4mm (L*W*T);           Weight         1.6Kg;	Storage	Memory	128MB
Working         -40 ℃ − +60 ℃           Environments         10%−95%RH           Water Proof         IP65           Dimensions         408.0mm*150.0mm*46.4mm (L*W*T);           Weight         1.6Kg;	Others	Power	DC 10~15V
Others         Environments         10%—95%RH           Water Proof         IP65           Dimensions         408.0mm*150.0mm*46.4mm (L*W*T);           Weight         1.6Kg;		Power Consumption	Standby ≤1W,work ≤10W
Others         Water Proof         IP65           Dimensions         408.0mm*150.0mm*46.4mm (L*W*T);           Weight         1.6Kg;		Working	-40°C − +60°C
Water Proof         IP65           Dimensions         408.0mm*150.0mm*46.4mm (L*W*T);           Weight         1.6Kg;		Environments	10%-95%RH
Weight 1.6Kg;		Water Proof	IP65
		Dimensions	408.0mm*150.0mm*46.4mm(L*W*T);
Installation Method Flush mounted		Weight	1.6Kg;
		Installation Method	Flush mounted




## **Dimensions**

Dimension

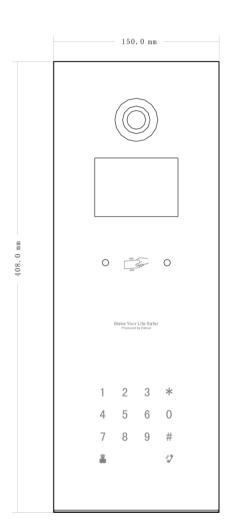

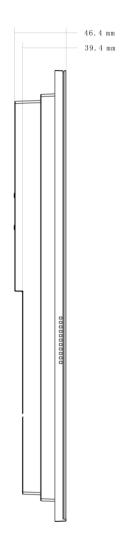

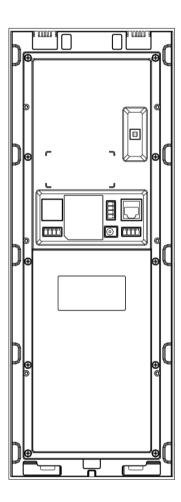

### Dahua Technology Co., Ltd.

1199BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883 Fax: +86-571-87688815

Email:overseas@dahuatech.com

www.dahuatech.com